




1



2

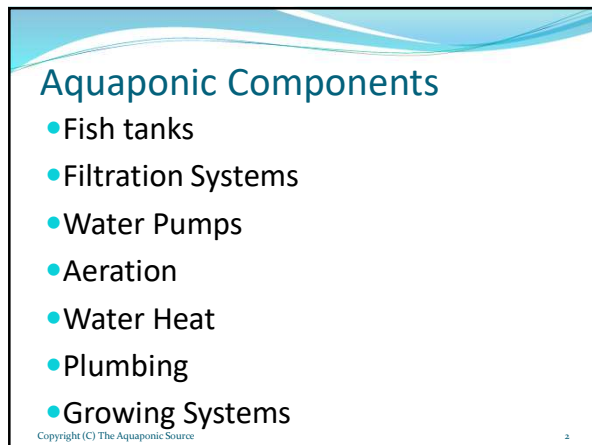

3

Round Tanks

- Most aquaculture tanks are round
- Allows for rotational flow of water
- Creates “self cleaning” environment where solids can be forced to the bottom center drain
- Dia:depth ratio 3:1 & 6:1
- Flow distributes feed and fish
- Grading – Harvesting can be more challenging



Copyright (C) The Aquaponic Source

4

4

Cornell Dual Drain Design



Copyright (C) The Aquaponic Source

5

5


Rectangular or Raceway tanks

Advantages

- Excellent use of floor space
- Easy handling, grading and sorting of fish
- Common in flow through systems, Trout culture

Disadvantages

- Not typically self cleaning
- Can develop low flow zones where solids can accumulate

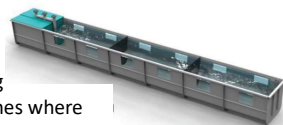



Copyright (C) The Aquaponic Source

6

6

"Safe" Materials

Make sure all your system components are fish and food safe

- Polypropylene - labeled PP 
- High Density Polyethylene - labeled HDPE 
- High Impact ABS (Hydroponic Grow Trays)
- EPDM or PVC (poly vinyl chloride) pond liner (make sure its UV resistant and avoid fire retardant material)
- Fiberglass tanks and grow beds
- Rigid white PVC pipe and fittings, black vinyl tubing, ABS
- **DO NOT use Copper plumbing – It is toxic to the fish**

Copyright (C) The Aquaponic Source

7

7

Pump Selection Considerations

- Total head, discharge flow, suction lift required
- Liquid to be pumped and its characteristics (freshwater, saltwater, solids)
- Submersible or external pump
- Continuous or intermittent pumping
- Power source available (single or three phase power, diesel or gas engine)
- Space, weight, budget, reliability
- You get what you pay for!

Copyright (C) The Aquaponic Source

8

8

Pump Selection Considerations

- **Flow Rate - gallons per hour (GPH), gallons per minute (GPM)**
 - The volume of flow which passes per unit of time
 - Size of your system, fish, tank volumes, number of tanks
- **Velocity – speed of flow over distance measured in ft/s or m/s**
- **Head - Head is a measure of resistance to flow**
 - As you increase the head, (height above the full flow head) you will decrease the flow rate.
 - To maximize your flow, you must minimize your head.

Copyright (C) The Aquaponic Source

9

9

- Speed increases when cross-sectional area decreases, and speed decreases when cross-sectional area increases.

Figure 2. When a tube narrows, the same volume occupies a greater length. For the same volume to pass points 1 and 2 in a given time, the speed must be greater at point 2. The process is exactly reversible. If the fluid flows in the opposite direction, its speed will decrease when the tube widens. (Note that the relative volumes of the two cylinders and the corresponding velocity vector arrows are not drawn to scale.)

Copyright (C) The Aquaponic Source

10

10

Table 3.1 Frictional Head Losses per 100 ft. Sched. 40 Steel Pipe Using Formula: $H_f = \frac{f L V^2}{2 g D}$ (ft.)

Frictional Head Losses per 100 ft. Sched. 40 Steel Pipe Using Formula: $H_f = \frac{f L V^2}{2 g D}$ (ft.)

Frictional Head Losses per 100 ft. Sched. 40 Steel Pipe Using Formula: $H_f = \frac{f L V^2}{2 g D}$ (ft.)

Pipe Size (in.)	1 inch		1-1/4 inch		1-1/2 inch		2 inch		3 inch	
	Velocity (ft/min)	Head Loss (ft/100 ft)	Velocity (ft/min)	Head Loss (ft/100 ft)	Velocity (ft/min)	Head Loss (ft/100 ft)	Velocity (ft/min)	Head Loss (ft/100 ft)	Velocity (ft/min)	Head Loss (ft/100 ft)
1	0.75	0.28	0.12	0.43	0.07	0.03				
2	1.88	1.25	0.66	1.09	0.40	0.17	0.80	0.19	0.08	
3	2.43	2.43	1.23	1.52	0.75	0.32	1.12	0.35	0.15	
4	3.76	5.51	2.29	2.17	1.45	0.63	1.60	0.68	0.30	0.07
5	5.64	11.47	4.06	3.26	2.40	1.33	2.40	1.45	0.63	0.19
6	7.52	19.87	6.61	4.35	3.23	2.26	3.19	2.47	1.07	0.32
8				6.43	5.23	3.42	3.99	3.73	1.62	0.68
10				8.52	7.96	4.40	4.79	5.22	2.29	2.91
12							6.39	6.95	3.61	5.29
14										
16										
18										
20										
22										
24										
26										
28										
30										
32										
34										
36										
38										
40										
42										
44										
46										
48										
50										
52										
54										
56										
58										
60										
62										
64										
66										
68										
70										
72										
74										
76										
78										
80										
82										
84										
86										
88										
90										
92										
94										
96										
98										
100										
102										
104										
106										
108										
110										
112										
114										
116										
118										
120										
122										
124										
126										
128										
130										
132										
134										
136										
138										
140										
142										
144										
146										
148										
150										
152										
154										
156										
158										
160										
162										
164										
166										
168										
170										
172										
174										
176										
178										
180										
182										
184										
186										
188										
190										
192										
194										
196										
198										
200										
202										
204										
206										
208										
210										
212										
214										
216										
218										
220										
222										
224										
226										
228										
230										
232										
234										
236										
238										
240										
242										
244										
246										
248										
250										
252										
254										
256										
258										
260										
262										
264										
266										
268										
270										
272										
274										
276										
278										
280										
282										
284										
286										
288										
290										
292										
294										
296										
298										
300										

Copyright (C) The Aquaponic Source

11

11

Total Dynamic Head - TDH

- Static Head - Vertical distance to raise the water**
 - Measure from the surface of the tank (vertically), to the highest point where the water is discharged to the atmosphere.
 - This is usually from a sump tank to the top of the fish tanks.
- Friction Head - Resistance on water flow through pipes and fittings.**
 - The higher the flow rate, and/or the smaller the pipe, the higher the resistance.
 - Determine your overall pipe length, including equivalent length for your fittings.
 - Consult the Friction Loss Chart or Calculator.

Copyright (C) The Aquaponic Source

12

Total Dynamic Head - TDH

- **Pressure Head - Any additional pressure required by filters, UV lights, spray nozzles, etc.**
 - Determine the pressure drop across each device.
 - The conversion is 1 psi = 2.31 head feet. (ie. a 5 psi drop across a filter = 11.55 feet.)
- **Determine your TDH** (as represented on pump curves and tables)
- Add your static head + friction head + pressure head.

Now that you know your flow and head, you can select a pump that provides this performance, and does so efficiently.

Copyright (C) The Aquaponic Source 13

13

MDM Pump Selector mdm-inc.com

System Curve with Pump Performance

KW State Selection

Pipe ID (in):

Target Flow (GPH):

Pressure Head (psi):

Pipe Length (ft):

Static Head (ft):

[Equivalent Length Calculator](#)

Annual Savings:

Product Family	Pump	Flow (GPH)	Power (W)	Daily Cost	Monthly Cost	Annual Cost
14						

14

Common Pump Applications

Copyright (C) The Aquaponic Source 15

15

Filtration Basics

- **Mechanical Filtration - capture and removal of solid wastes**
 - Settable solids – float on surface or settle to bottom
 - Drops out of water column within an hour
 - Suspended solids – captured in screens, nets, media, brushes
 - Drops out of water column within two to three hours
 - Dissolved solids – most difficult to separate and capture
 - May remain in water column without clearing
- **Biological Filtration - converts Ammonia to Nitrites and Nitrate**
 - Requires proper surface area for nitrifying bacteria to colonize
 - Requires proper aeration and alkalinity for optimal performance

Copyright (C) The Aquaponic Source

16

16

Mechanical Filtration Methods

- Focus on removing the heaviest “settleable” solids
 - Fish feces and uneaten feed
- Settling Basins
- Radial Flow Clarifiers
- Swirl Separators
- Drum Filters
- Bead Filters

Fish waste solids should be filtered from the water because they clog the plant’s fine root hairs blocking water, oxygen and nutrient uptake

Copyright (C) The Aquaponic Source


17

17


Radial Flow Clarifiers

Cone-Bottom, Cylindrical
Polytank PI-308A

120 gal, 42" depth, 28" dia, 58" tall
45 Deg Bottom angle



Radial Flow Clarifier - 20 gpm
HLR 4.6 gpm/ft²



Detail for drain legs
2 inch End Cap
2 inch Screen over pipe

2 inch 45 Street El

Conceptual Drawing

Flowing Aquaponics Consulting	Radial Flow Clarifier: 20 gpm
1/2" x 1/2"	1/2" x 1/2"
1/2" x 1/2"	1/2" x 1/2"
1/2" x 1/2"	1/2" x 1/2"


Copyright (C) The Aquaponic Source

18

18

Swirl Settlers

- Rotating flow transports settleable solids to bottom center drain

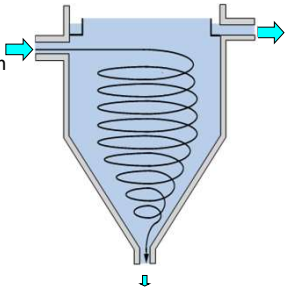


Copyright (C) The Aquaponic Source 19

19

Bead Filters


NORMAL OPERATION



Mixing Motor OFF
Surge Valve CLOSED
Inlet Valve OPEN
Pump ON
Emergency Drain CLOSED

Most of the time the filter will operate in the filtration mode.

BACKWASHING...

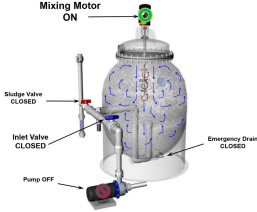


Mixing Motor ON
Surge Valve CLOSED
Inlet Valve CLOSED
Pump OFF
Emergency Drain CLOSED

Copyright (C) The Aquaponic Source 20

20

Bio Filtration

- Mechanical filtration often installed before biofilter
- High specific surface area (SSA) media for nitrifying bacteria to propagate, measures in ft^2/ft^3 or m^2/m^3
- High oxygen aerobic environment
- Solids must not accumulate on bio media or heterotrophic bacteria will dominate and nitrifying bacteria will suffer



Copyright (C) The Aquaponic Source 21

21

Aeration Terminology

- *cfm* - cubic feet per minute (volume of air flow)
- *psi* - pounds per square inch (the higher the pressure in the system, the lower the flow - cfm - will be)
- *diffuser* - attachment to air lines which emits extremely fine air bubbles into the water increasing the surface area of the air bubbles, which increases the amount of air diffused into the water

Copyright (C) The Aquaponic Source

22

22

Aeration continued...

- **AIR PRESSURE** - To form bubbles there must be enough pressure to overcome the water pressure at the diffuser's depth, the piping friction loss and the diffuser's resistance to air flow. 1 psi = 2.7' depth
- Example: For a water depth of 36", a low restriction piping system of 4" of water and a low-resistance air diffuser of 10" of water (just prior to cleaning), will require an air pressure of at least 50" of water (36" + 4" + 10"). This is equal to about 2 psi.
- **AIR VOLUME**. In a larger farm facility, you might want two or more primary blower compressors and one emergency backup.
- **AIR FLOW**. When using low pressure air, it's important that the air piping system and diffuser offer little resistance to air flow.

Copyright (C) The Aquaponic Source

23

23

Air Diffusers

- Oxygen is transferred into water by having a density differential (low oxygen water to high oxygen air)
- The smaller the bubbles, the greater the surface area, but small bubbles require higher pressure.
- Medium pore air diffusers are recommended as the most cost effective.
- The deeper the diffusers, the longer the time the air bubbles are exposed to the water, increasing diffusion and oxygen transfer



Copyright (C) The Aquaponic Source

24

24

Regenerative Blowers

Most reliable and economic for recirculating systems requiring high volume low pressure (< 4 psi)



Copyright (C) The Aquaponic Source

25

25

Water Heat Sources

- Natural Gas
- Propane
- Electric
- Wood
- Geothermal
- Solar Thermal

Copyright (C) The Aquaponic Source

26

26

Minimizing heat loss

- Most heat will be lost to the surrounding air
- Maintaining consistent ambient air temperature 60 to 75F will greatly influence water temperature
- Insulate tanks and troughs
- Buried tanks can lose heat easily into the ground so insulate those tanks as well
- Water is the best source of thermal mass

Copyright (C) The Aquaponic Source

27

27

Natural Gas or Propane

- AquaHeat “tankless” boiler
- Consumption measured in BTU (British Therm Units)
- Used distilled or filtered water inside coil, not fish tank water
- Glycol not necessary
- Can heat water in a sump, fish tank or under the DWC
- Can also be hooked up to solar thermal panels with gas as backup




Copyright (C) The Aquaponic Source

28

28

Hot Water Loop Location

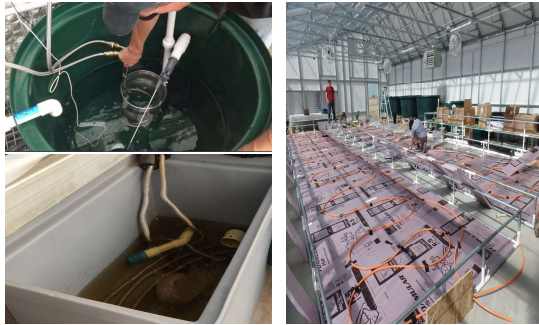


Copyright (C) The Aquaponic Source

29

29

Electric Heat

- For every 9°F (5°C) difference, there should be 4W of heat per gallon (3.8 liters) of water.
- Elevated, uninsulated tanks, with a large amount of surface agitation, could require as much as 12W per gallon per 9°F.
- Measured in Watts or Kilowatts Per Hour (kWh)

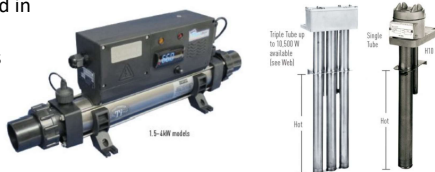

Copyright (C) The Aquaponic Source

30

30

Wood/Pellet Stove, Rocketmass

- Requires manual feeding or autofeed
- May be cost effective if pellets are locally available
- Considerations for venting/emissions
- Be careful with fire/smoke
- Rocketmass heaters sound great, but they aren't that effective and will keep you up all night long



Copyright (C) The Aquaponic Source

31

31

Geothermal

Well or Hot Spring

- Can be pumped through tubing or used as the actual system water
- Water tests important to check for sulfur and other minerals that may not be useable for fish or plants
- Only available on property with a geothermal well

Ground loop – “heat” pump

- Used for heating or cooling
- Loop installed vertically or horizontally underground
- Requires electricity to operate system/pump
- Electrical costs could be more in some locations
- Consider “renewable” other than electric use

Copyright (C) The Aquaponic Source

32

32

Solar Thermal

- Several installation options
- Large panels are very heavy and should only be ground mounted
- Vacuum-tubes create much hotter water with smaller unit
- Use great caution with heated water exchange between panels and the tank water
- Can be run through a gas-style heat exchanger loop



Copyright (C) The Aquaponic Source

33

33

Heating Decisions

- What is available in your existing building?
- What options are available for a new build?
- What is “historically” been the least expensive fuel source in your area?
- If investing in geothermal, what is the expected payback timeframe or cost savings?
- The sun isn’t “free” for solar panels if it doesn’t shine much in the winter when you need it for heating
- Heating is usually only necessary for a few months a year


Copyright (C) The Aquaponic Source

34

Water Chillers

- May be necessary in hot climates or greenhouses in summer
- Important for certain fish species such as trout and salmon who thrive under 60° F (15.5° C)
- Air cooled or water cooled condensers – like an AC unit
- Runs on electricity 150 – 1000W
- Plus a circulation pump 1/8 HP – 1HP
- Heat pump/chiller combination

Copyright (C) The Aquaponic Source



35

Bulkheads and UniSeals



Copyright (C) The Aquaponic Source

36

Plumbing Nomenclature

- **MPT** – Male Pipe Thread – This means that the part has a threaded end that threads inside of another part which has Female Pipe Thread
- **FPT** – Female Pipe Thread – This means that the part has a threaded end into which fits another part that has Male Pipe Thread
- **Slip** – This means that the part has an end that has no threads. It accepts a section of PVC
- **SOC** – This is exactly the same as “Slip” defined above

Copyright (C) The Aquaponic Source

37

37

Aquaponic Systems Designs

- Deep Water Culture
- Media
- NFT – nutrient film technique
- Vertical
- Bucket Systems
- Hybrid Systems

Copyright (C) The Aquaponic Source

38

38

Deep Water Culture or Raft Method



Image and copy credit – University of the Virgin Islands
Copyright (C) The Aquaponic Source

39

39

UVI Deep Water Culture

The diagram illustrates a UVI Deep Water Culture system. It starts with 'Fish rearing tanks' (blue circles) on the left. Water flows from these tanks through a 'Sump' and 'Clarifier-Filter tanks' (orange rectangles). From there, it goes through 'Base addition' (blue circle) and 'Degassing' (orange rectangle) before entering 'Hydroponic tanks' (green rectangles) on the right. An 'Effluent line' leads from the hydroponic tanks back to the fish rearing tanks, and a 'Return line' leads from the bottom of the hydroponic tanks back to the sump. The copyright notice 'Copyright (C) The Aquaponic Source' and the number '40' are at the bottom.

40

Deep Water Culture (Raft System)

- Plants float and grow directly on the nutrient rich water
- Crops easily move up the water trough for harvesting
- Steady rotations and planting densities allow for a more predictable and consistent harvest
- DWC systems in research and production for over 30 years

The first photo shows long rows of white rafts floating in a large greenhouse water trough, covered with green leafy plants. The second photo shows two people, a man and a woman, standing in a greenhouse and harvesting plants from a raft. The copyright notice 'Copyright (C) The Aquaponic Source' and the number '41' are at the bottom.

41

Older DWC Installations


- Commonly used wood structures with liner stapled inside
- Wood structures had problems with rot, warping, termites, ants and other pests
- Wood is not food safe
- Raft boards were blue or pink insulation
- sometimes painted with exterior paint
- Used net pots for holding plants

The photo shows a man in a blue shirt standing next to a large, rectangular wooden structure used for Deep Water Culture. The structure is filled with water and has many net pots hanging from it, each containing a plant. The copyright notice 'Copyright (C) The Aquaponic Source' and the number '42' are at the bottom.

42

DWC Advantages

- Power loss does not result in a catastrophic loss of plants as it can with vertical towers or NFT based systems
- DWC is perfect for high quality head lettuce, greens and herb production allowing for better market acceptance. Lettuce does not distort its shape as it can in vertical towers.
- Large water volume provides for a more stable temperature, pH and buffering capacity while also providing thermal mass which contributes to the passive heating and cooling of the greenhouse.



28 hole Lettuce raft board


Copyright (C) The Aquaponic Source

43

43

DWC Assembly

- Lightweight rigid metal structure
- Easy and quick to assemble
- Scalable from a few rafts to large farm implementations
- Rafts can be plumbed in parallel for isolation of each trough
- Meets food safety specifications for a sanitizable surface
- No hassles of wood construction



Copyright (C) The Aquaponic Source

44

44

DWC Systems

Double Deck System



Ground Mount



Elevated – ADA Accessible



Copyright (C) The Aquaponic Source

45

45

Raft boards

- Specific plant spacing – Beaver raft boards (other vendors)
 - 18 hole rafts – 2.25 plants/sf – for large heads, bushy herbs
 - 28 hole rafts – 3.5 plants/sf – for medium heads, herbs
 - 36 hole rafts – 4.5 plants/sf – for small heads, thin herbs
 - 72 hole rafts – 9 plants/sf – for slender stems, kale, chard
- Raised Plants – helps keep water off the stem
- Better Crops – More airflow, less water touching the edible portion of the crop, less hiding places for pests
- Food grade – high compression polystyrene
- Sealed surface – to resist water penetration

Copyright (C) The Aquaponic Source

46

46

Media Beds

- Common in home flood and drain systems
- Media provides surface area for bacteria
- Typically 12" deep, good for fruiting crops
- Can inoculate with bacteria and worms for "composting"
- Media eventually needs to be cleaned out



Copyright (C) The Aquaponic Source

47

47

Flood and Drain Media

- LECA – Light Expanded Clay Aggregate
 - Hydroton, Plant It, Hydrocorls, Hydrocorn
- Expanded Shale
- River Rock

Don't use

- Lava Rock
- Pea Gravel
- Recycled Glass Stones



Copyright (C) The Aquaponic Source


48

48

Flood and Drain or Continuous Flow

Media beds can be run to fill and drain in different ways

- Flood and Drain – fill the entire bed, then drain the bed
 - Pump on timer – 15 minutes to fill, 45 minutes off to drain
 - Bell siphon – water fills until it triggers siphon which drains bed and begins refilling again
- Continuous flow – pump flows constantly and water fills bed and drains the bed at a constant rate



Copyright (C) The Aquaponic Source

49

49

Bucket Systems

- 55 gallon nutrient reservoir
- Decoupled from the AP system
- Allows more specific nutrient control
- Vining crops like less nitrogen more phosphorous, boron, micronutrient
- Gravity-fed drip to buckets
- No parts to break (can clog)



Copyright (C) The Aquaponic Source

50

50

Nutrient Film Technique (NFT)

Filtered water trickles through and runs along root zone

- Commonly found in hydroponics
- Challenging if pump clogs or power fails
- Uses about 1% of water
- Tubes can build up bioslime and clog with roots and debris



Copyright (C) The Aquaponic Source

51

51

Vertical Towers



Copyright (C) The Aquaponic Source

52

52

Vertical Growing

Advantages

- Use of vertical space
- Good for hydroponics, container or warehouse based systems using artificial lighting

Disadvantages

- Pump or power failure can result in crop loss
- Inconsistent growing in natural sunlight. Required tower spacing does not equal more plants per sq ft than DWC
- **Water can drip on plants which poses a food safety issue in aquaponics (FDA inspection identified risk)**

Copyright (C) The Aquaponic Source

53

53

Fodder/Forage Solutions



Farmtek – Growersupply.com www.foddersolutions.org

54

Wicking Beds

- Bottom half gravel with fill pipe
- Top half soil media, wicks up moisture
- Dead end system – water added, not recirculated
- Primarily used for root crops in aquaponics
- **Undetermined if wicking bed crops would be considered “food safe” since edible crop is in contact with fish water**



Copyright (C) The Aquaponic Source 55

55

Hybrid systems – Combining methods

- Deep Water Culture, Media beds and other growing methods can work well together **if your goal is to diversify your crop production**
- Maximize Deep Water Culture production **if your goal is profitability**



Copyright (C) The Aquaponic Source 56

56

Aquaponic System Designs

Design your system components to fit your goals

- Design your farm to fit your building, light, crop and other space planning characteristics
- Each system design requires different management techniques and has its own benefits and challenges
- There are a variety of engineering principles that go into designing an aquaponic farm (to be discussed)
- Your goals and farm design may change over time and require reconfiguration
- Plan on paper or electronically before building

Copyright (C) The Aquaponic Source 57

57
