




THRIVE AGRITECH

222 Broadway New York, NY 10038
(800) 205-7216
thriveagritech.com
info@thriveagritech.com

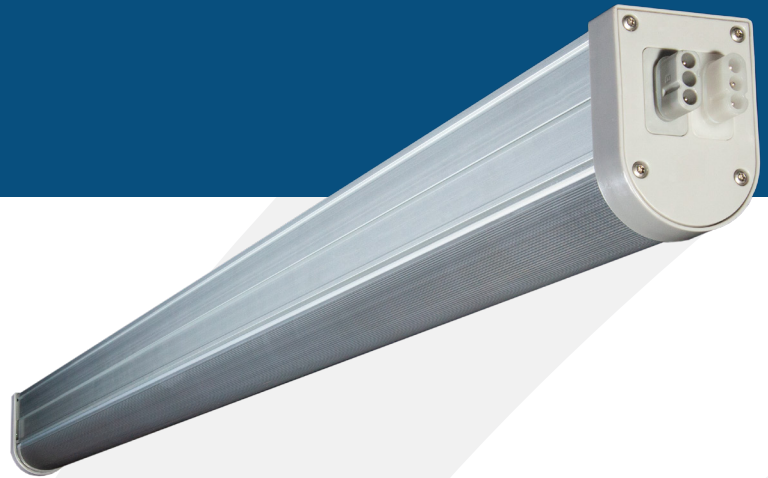

INFINITY 2.0

LED Light Bar

The new Infinity 2.0 LED Light is a high efficiency, dimmable grow light developed specifically to enable quick and easy installation.

FEATURES & BENEFITS

- Simple wiring & daisy-chaining
- 0-10V dimming from max to off
- UL & cUL Listed
- IP66 Waterproof Rated
- 5-Year Warranty

SPECIFICATIONS

- 100V-277V
- 65W Input Power
- 145 $\mu\text{mol}/\text{sec}$
- 2.2 $\mu\text{mol}/\text{joule}$
- Full Spectrum White
- 120-degree Beam angle
- 65,000 Hour Lifetime

DIMENSIONS

2.15" H




2.75" W

47.25 inches (1,200mm)




ILLUMINATION BEAM ANGLES

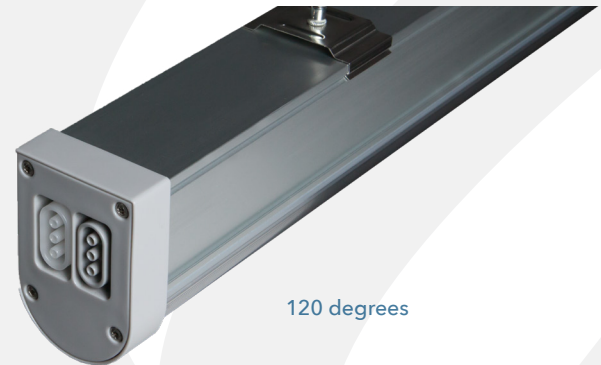

120 degrees


FULL SPECTRUM WHITE

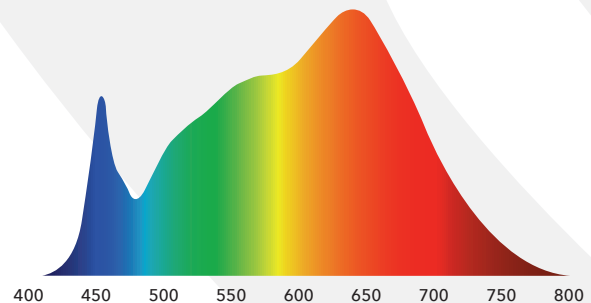



THRIVE AGRITECH

222 Broadway New York, NY 10038
(800) 205-7216
thriveagritech.com
info@thriveagritech.com

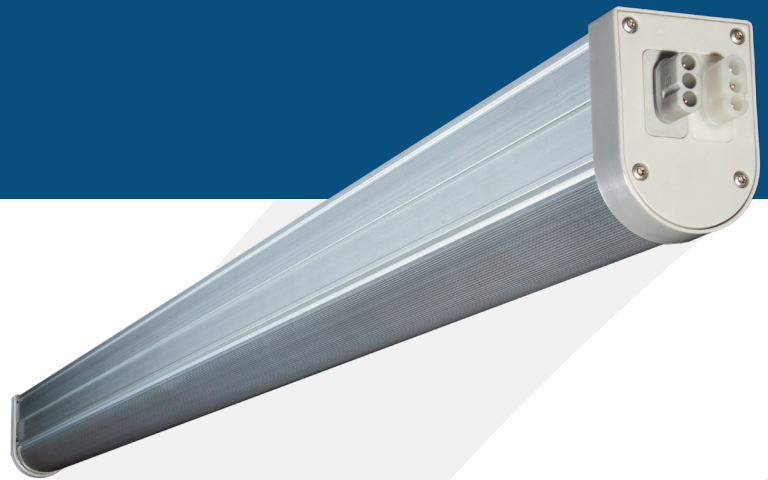

INFINITY 2.0

LED Light Bar

DIMMING


Two wire 0-10V dimming. Dimming spans from max intensity to off.

Dimming control access via fixture connector and cable.



WIRING & INTERCONNECTION

Infinity 2.0 LED light bars can be electrically connected end-to-end or with an interconnection cable. See the installation manual for detailed instructions.

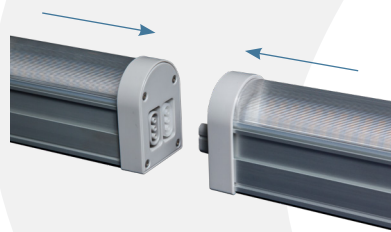


MAXIMUM DAISY-CHAIN


Voltage	Max # of connected
110	10
240	26
277	32

MOUNTING

FLUSH MOUNT

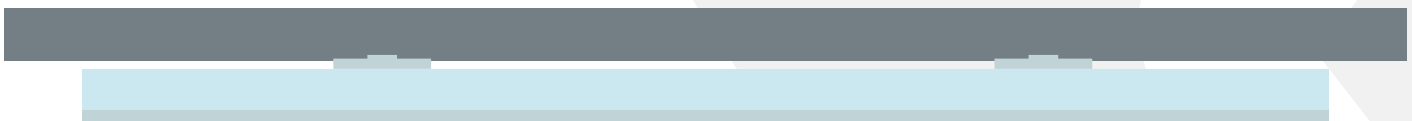

SUSPENSION MOUNT

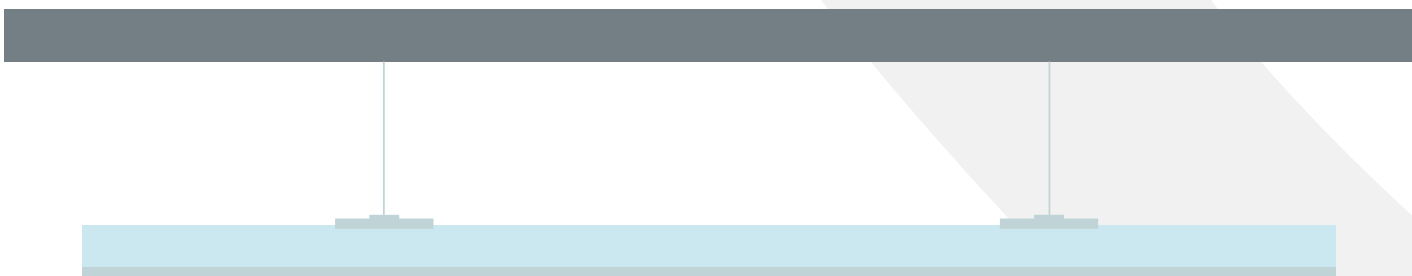

LIGHTING LAYOUTS

Lighting layouts for a variety of horticulture applications available, if you need a customized lighting layout, please contact our customer support team. (800) 205-7216 • thriveagritech.com • info@thriveagritech.com

